

quarto-touying-typst

A complete feature tour

Your Name 

you@example.org

Your Institution

July 17, 2026

Section Slide as Header Level 1

Slide Title as Header Level 2

Subtitle as Header Level 3

You can put any content here, including text, images, tables, code blocks, etc.

- ▶ first unordered list item

- A sub item

1. first ordered list item

- i. A sub item

Next, we'll briefly review some theme-specific components.

- ▶ Note that ***all*** of the standard Quarto + Typst **features** can be used with this extension
- ▶ Also, all the **Touying** features can be used by **Typst native code**

Before You Go...

`quarto-touying-typst` does not depend on any language. You can use it with any language supported by Quarto, including R, Python, Julia.

For this demo, I use R code to show the figures and tables usage in the slides.

⚠ Required Software (this demo only)

R Packages:

```
install.packages(c("modelsummary", "tinytable", "dplyr", "ggplot2", "showtext"))
```

Components

Components

Ordered & Unordered Lists

Here we have an unordered list.

- ▶ first item
 - sub-item
- ▶ second item

And next we have an ordered one.

1. first item
 - i. sub-item
2. second item

Components

Alerts & Cross-refs

Special classes for emphasis

- ▶ `.alert` class for default emphasis, e.g. **the second accent color**.
- ▶ `.fg` class for custom color, e.g. `with options='fill: rgb("#5D639E")'`.
- ▶ `.bg` class for custom background, e.g. **with the default color**.

To cross-reference, you have several options, for example:

- ▶ Beamer-like `.button` class, e.g. [▶ Appendix](#)
- ▶ Sections are not numbered in Touying, you cannot use `@sec-` cross-references

Components

Citations

Citations follow the standard [Quarto format](#) and can be sourced from BibLaTeX, BibTeX, or CSL files. For example:

- ▶ **Topic 1:** Review of DID (Arkhangelsky and Imbens 2024)
- ▶ **Topic 2:** Goodman-Bacon (2021)

Small Citations

In many cases, you may want to use small citations, like

- ▶ **Staggered DID** (Callaway and Sant'Anna 2021; Sun and Abraham 2021; Borusyak et al. 2024)

The `.small-cite` class is a built-in command of this extension.

Components

Blocks

Quarto provides [dedicated environments](#) for theorems, lemmas, and so forth.

But in presentation format, it's arguably more effective just to use a [Callout Block](#).

i Regression Specification

The main specification is as follows:

$$y_{it} = X_{it}\beta + \mu_i + \varepsilon_{it}$$

Components

Multicolumn 1: Text only

Column 1

Here is a long sentence that will wrap onto the next line as it hits the column width, and continue this way until it stops.

Some text that should be laid out below the code

Column 2

Some other text in another column.

A second paragraph.

[Quarto's layout](#) is more simple and flexible than Touying's native multicolumn support.

Components

Multicolumn II: Text and Figures



- ▶ First point
- ▶ Second point

For simple cases, you don't even need to specify the class for each column.

Ad-hoc Styling

Typst CSS

- ▶ Quarto supports *Typst CSS* for simple styling
- ▶ You can change *colors*, *backgrounds*, and *opacity* for *span* elements

You can also change the font size and family for *div* elements.

Vertical Spacing

- ▶ A helper shortcode `{{< v DIST >}}` is provided to add vertical spacing
- ▶ This is converted to a Typst code `#v(DIST)` internally.

This is a *2em* vertical space from above.

Custom Styling

Like the `latex-environment` extension, you can wire your own `div` and `span` classes.

```
format:
  touying-typst:
    include-in-header: "custom.typ"
    commands: [foo]
    environments: [bar]
```

- ▶ Define the Typst functions in `custom.typ`
 - `commands` in YAML is for inline elements `[text]{.foo}`
 - `environments` in YAML is for block elements `::: {.bar}\nbody\n:::`
- ▶ `[text]{.foo options="opts"}` is converted to `#foo(opts)[text]` internally
- ▶ Pass `name: typst-function` pairs to map a class to a different function
- ▶ If you want to use `self` as an argument, you can use `touying-fn-wrapper()`

brand.yml Support

```
brand:
  typography:
    base: Montserrat
    headings:
      family: Josefin Sans
      weight: semi-bold
  color:
    palette:
      green: "#009F8C"
      pink: "#B75C9D"
    primary: green
    secondary: pink
```

- This extension supports `brand.yml` for typography and color settings

Animations

Simple Animations

Touying's [simple animations](#) are available as `{{< pause >}}` and `{{< meanwhile >}}`

This line appears meanwhile.

Simple Animations

Touying's [simple animations](#) are available as `{{< pause >}}` and `{{< meanwhile >}}`

This line appears after a pause.

This line appears meanwhile.

As in Reveal.js, you can use `. . .` for a pause in the slide.

Animations in Lists

Pause in Lists

Simple animations `{{< pause >}}` can be used in lists

- ▶ First

Animations in Lists

Pause in Lists

Simple animations `{{< pause >}}` can be used in lists

- ▶ First
- ▶ Second

Incremental Class

As in Reveal.js, you can use the `.incremental` class

- ▶ First

Animations in Lists

Pause in Lists

Simple animations `{{< pause >}}` can be used in lists

- ▶ First
- ▶ Second

Incremental Class

As in Reveal.js, you can use the `.incremental` class

- ▶ First
- ▶ Second

Complex Animations

Touying's [complex animations](#) are available as the `{.complex-anim repeat=4}` environment.

At subslide 1, we can

use `\setcomplexanim` for reserving space,

use `\setcomplexanimnot` for not reserving space,

call `\only` multiple times **X** for choosing one of the alternatives. But only works in native Typst code.

Complex Animations

Touying's `complex animations` are available as the `{.complex-anim repeat=4}` environment.

At subslide 2, we can

use the `{.uncover}` environment for reserving space,

use the `{.only}` environment for not reserving space,

use `#alternatives` function ✓ for choosing one of the alternatives. But only works in native Typst code.

Complex Animations

Touying's `complex animations` are available as the `{.complex-anim repeat=4}` environment.

At subslide 3, we can

use the `{.uncover}` environment for reserving space,

use the `{.only}` environment for not reserving space,

use `#alternatives` function ✓ for choosing one of the alternatives. But only works in native Typst code.

Complex Animations

Touying's [complex animations](#) are available as the `{.complex-anim repeat=4}` environment.

At subslide 4, we can

use the `{.uncover}` environment for reserving space,

use the `{.only}` environment for not reserving space,


use `#alternatives` function ✓ for choosing one of the alternatives. But only works in native Typst code.

Other Features

- ▶ All the animation functions can be used in Typst Math code ([Appendix](#))
- ▶ `handout: true` in the YAML header is available for handout mode (without animations)



Figures & Tables

Figures

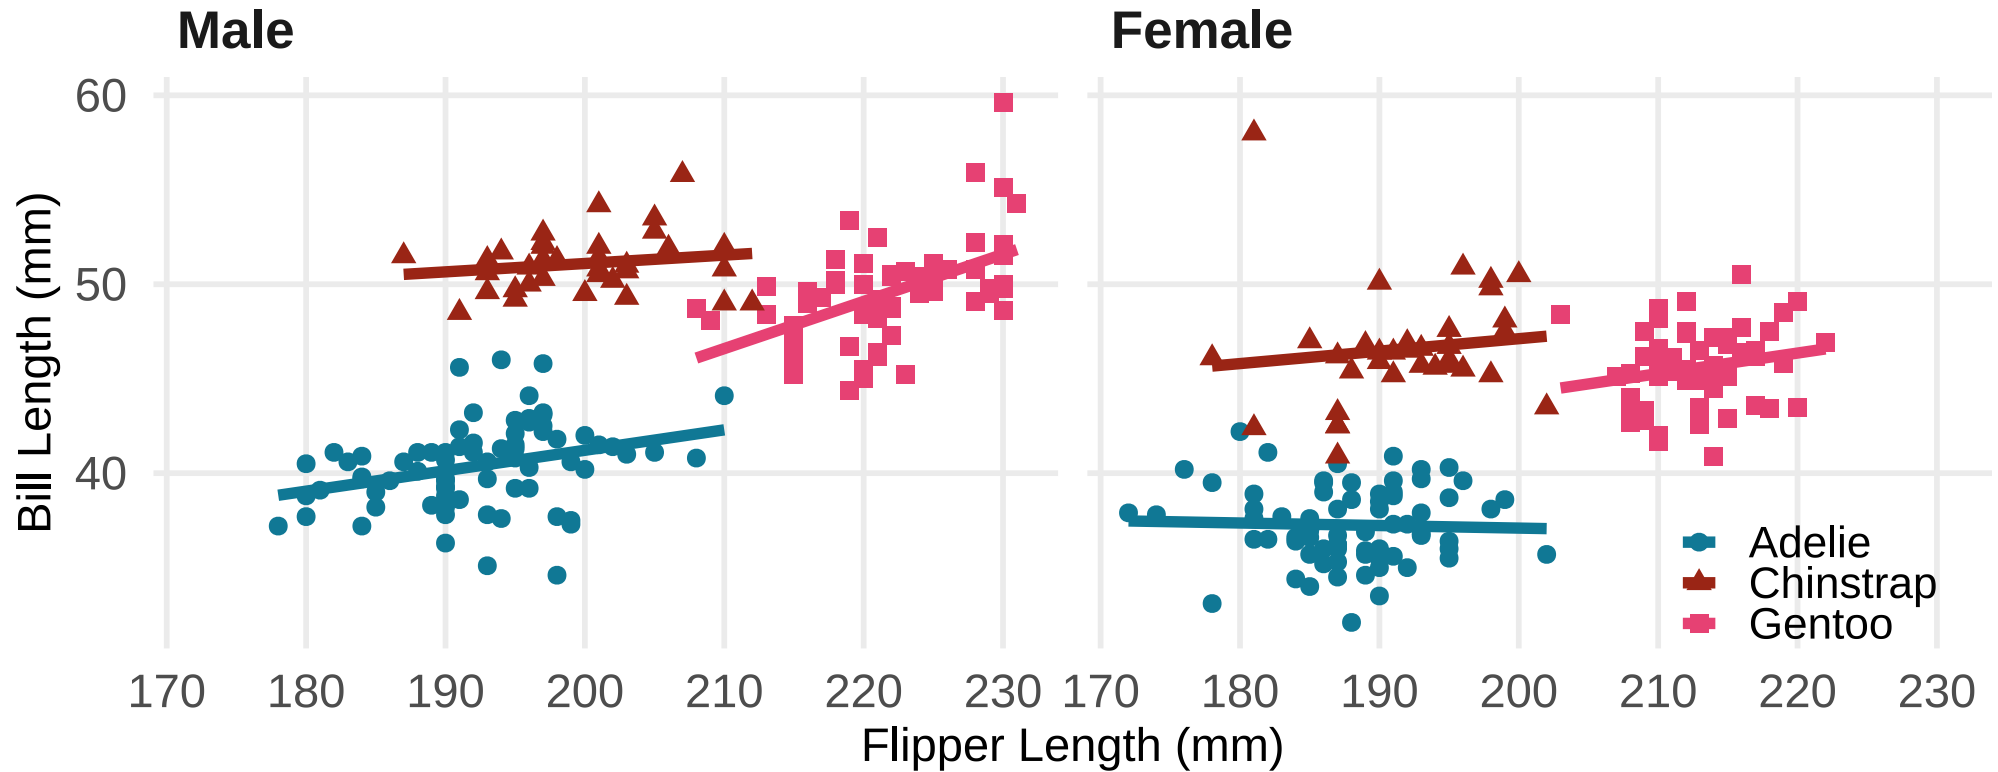

This is a `facet_wrap` example with the `penguins` dataset.

Figures

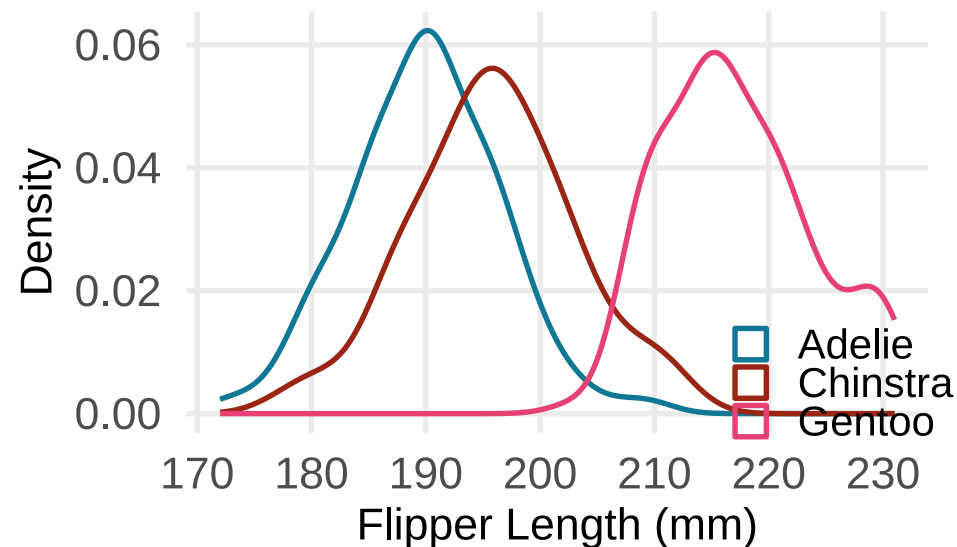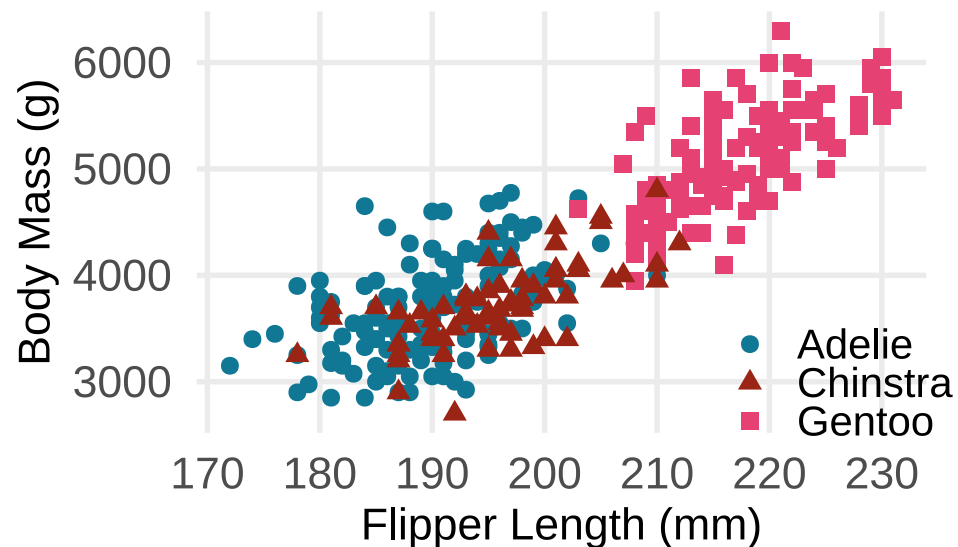

This is an example of `layout-ncol: 2` for two figures.

Tables

	Male				Female			
	Bill	Bill	Flipper	Body	Bill	Bill	Flipper	Body
	Length	Depth	Length	Mass	Length	Depth	Length	Mass
	(mm)	(mm)	(mm)	(g)	(mm)	(mm)	(mm)	(g)
Adelie	40.39	19.07	192.4	4043	37.26	17.62	187.8	3369
Gentoo	49.47	15.72	221.5	5485	45.56	14.24	212.7	4680
Chinstrap	51.09	19.25	199.9	3939	46.57	17.59	191.7	3527

- You can easily create Typst tables with `tinytable`

Tables

	Male				Female			
	Bill	Bill	Flipper	Body	Bill	Bill	Flipper	Body
	Length	Depth	Length	Mass	Length	Depth	Length	Mass
	(mm)	(mm)	(mm)	(g)	(mm)	(mm)	(mm)	(g)
Adelie	40.39	19.07	192.4	4043	37.26	17.62	187.8	3369
Gentoo	49.47	15.72	221.5	5485	45.56	14.24	212.7	4680
Chinstrap	51.09	19.25	199.9	3939	46.57	17.59	191.7	3527

- ▶ You can easily create Typst tables with `tinytable`
- ▶ You can **highlight** with `tinytable::style_tt()`!

Tables

	Male				Female			
	Bill	Bill	Flipper	Body	Bill	Bill	Flipper	Body
	Length	Depth	Length	Mass	Length	Depth	Length	Mass
	(mm)	(mm)	(mm)	(g)	(mm)	(mm)	(mm)	(g)
Adelie	40.39	19.07	192.4	4043	37.26	17.62	187.8	3369
Gentoo	49.47	15.72	221.5	5485	45.56	14.24	212.7	4680
Chinstrap	51.09	19.25	199.9	3939	46.57	17.59	191.7	3527

- ▶ You can easily create Typst tables with `tinytable`
- ▶ You can **highlight** with `tinytable::style_tt()`!
- ▶ Set `options(tinytable_quarto_figure = TRUE)` to create figures (tables) without captions

Regression Table

	Bill Length (mm)			Body Mass (g)		
	(1)	(2)	(3)	(4)	(5)	(6)
Chinstrap	10.042** (0.432)	10.010** (0.341)	10.037** (0.340)	32.426 (67.512)	26.924 (46.483)	27.229 (46.587)
Gentoo	8.713** (0.360)	8.698** (0.287)	8.693** (0.286)	1375.354** (56.148)	1377.858** (39.104)	1377.813** (39.163)
Male		3.694** (0.255)	3.694** (0.254)		667.555** (34.704)	667.560** (34.755)
Year			0.324* (0.156)			3.629 (21.428)
Observations	342	333	333	342	333	333

+ p < 0.1, * p < 0.05, ** p < 0.01

`modelsummary` is super useful for regression tables (`tinytable` is used internally)

Last Words

Installation

```
quarto add kazuyanagimoto/quarto-touying-typst
```

Appendix

- ▶ You can use `{{< appendix >}}` to start an appendix section. Slide numbering will be frozen. (Next slides.)

Appendix

Touying Math Animations

Touying equation with pause:

\$

$f(x) \delta = \text{pause } x^2 + 2x + 1 \quad \backslash$
 $\delta = \text{pause } (x + 1)^2 \quad \backslash$

\$

Touying equation is very simple.

Touying equation with pause:

$$f(x) =$$

Touying equation is very simple.

► Back to main

Touying Math Animations

Touying equation with pause:

\$

```
f(x) &= pause x^2 + 2x + 1 \
      &= pause (x + 1)^2 \
```

\$

Touying equation is very simple.

Touying equation with pause:

$$\begin{aligned} f(x) &= x^2 + 2x + 1 \\ &= \end{aligned}$$

Touying equation is very simple.

► Back to main

Touying Math Animations

Touying equation with pause:

\$

```
f(x) &= pause x^2 + 2x + 1 \
      &= pause (x + 1)^2 \
```

\$

Touying equation is very simple.

Touying equation with pause:

$$\begin{aligned} f(x) &= x^2 + 2x + 1 \\ &= (x + 1)^2 \end{aligned}$$

Touying equation is very simple.

► Back to main

References

- Arkhangelsky, Dmitry, and Guido Imbens. 2024. “Causal Models for Longitudinal and Panel Data: A Survey.” June 25. <https://doi.org/10.48550/arXiv.2311.15458>.
- Borusyak, Kirill, Xavier Jaravel, and Jann Spiess. 2024. “Revisiting Event-Study Designs: Robust and Efficient Estimation.” *The Review of Economic Studies*, February 6, rdae7. <https://doi.org/10.1093/restud/rdae007>.
- Callaway, Brantly, and Pedro H.C. Sant'Anna. 2021. “Difference-in-Differences with Multiple Time Periods.” *Journal of Econometrics* 225 (2): 200–230. <https://doi.org/10.1016/j.jeconom.2020.12.001>.
- Goodman-Bacon, Andrew. 2021. “Difference-in-Differences with Variation in Treatment Timing.” *Journal of Econometrics*, Themed Issue: Treatment Effect 1, vol. 225 (2): 254–77. <https://doi.org/10.1016/j.jeconom.2021.03.014>.

References

Sun, Liyang, and Sarah Abraham. 2021. “Estimating Dynamic Treatment Effects in Event Studies with Heterogeneous Treatment Effects.” *Journal of Econometrics* 225 (2): 175–99. <https://doi.org/10.1016/j.jeconom.2020.09.006>.